



Beijer Ref India – Hongsen HVAC & R Tools & Instruments Training-(2022)

**PREMIUM CAR AC
MANIFOLD KIT**



Supply with 3 x 60" Hoses
Set of Quick Coupler
Extra Large Gauges,
Screw Driver
Can Tap Valve HS-339A,




Model - HS-S36F-R134a

1. Complete set, more convenient
2. Quality components
3. Stable rubber cover



DOUBLE MANIFOLDS

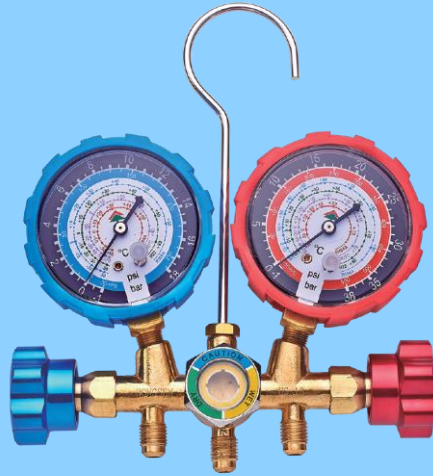


MODEL:- HS-536C

Manifold gauge set--Brass body
Refrigerants: R22 R134a, R404A
R407C

Unit: psi, bar °C

1. Soft rubber cover
2. 36" charging hose--3000psi
3. Aluminium knob

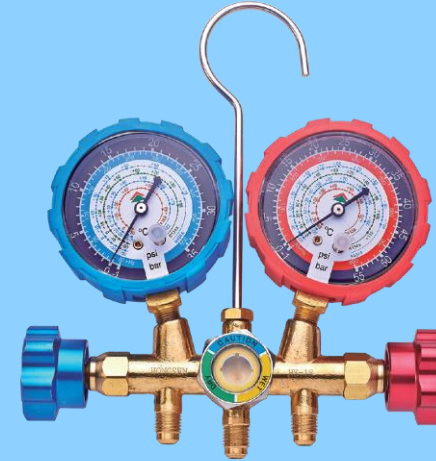

MODEL:- HS-536G-R410A

Manifold gauge set--Brass
body

Refrigerants: R32 R410A

Unit: psi, bar °C

1. Soft rubber cover
2. 36" charging hose--4000psi
3. Aluminum knob

SINGLE MANIFOLDS




MODEL:- HS-466NAH/NAL

Single manifold with gauge
H (with rubber cover)
Refrigerants: R410A R404A
R407c R134a Pressure
unit: psi bar
Temperature unit: °C



MODEL:- HS-468AH/AL

'Single manifold with gauge
H (with rubber cover)
Refrigerants: R32 R410A
Pressure unit: psi bar
Temperature unit: °C

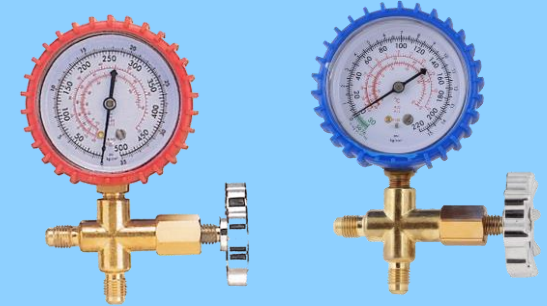


MODEL:- HS-466AH/AL

Single Gauge Manifold R22
High/low

HIGHLIGHTS

**One body design,
less leaking point,
more reliable**

QUICK COUPLERS

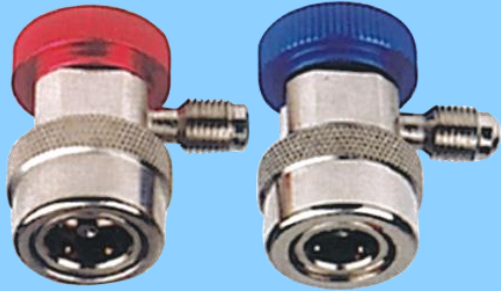

MODEL:- QC-MH/ML-1/4

R134a quick coupler
H/L(Male)



**MODEL:- QC-MH/ML-M14*1.5
Lock Type**

R134a quick coupler
H/L(Female) with
adapter M14*1.5-1/4SAE

HIGHLIGHTS

Strictly carried out according to J2196 standard, OEM for worlds' famous brands

CHARGING HOSE



**MODEL:- HS-12236/12250RYB
FOR - R22/R134A**

36" charging hose-3000 psi
R:1/4SAE(STR)-1/4SAE(45°)
Y:1/4SAE(STR)-1/4SAE(45°)
B:1/4SAE(STR)-1/4SAE(45)

60" charging hose-3000 psi
R:1/4SAE(STR)-1/4SAE(45°)
Y:1/4SAE(STR)-1/4SAE(45°)
B:1/4SAE(STR)-1/4SAE(45)

1. PTFE gasket, long-lasting
2. Hex knurled nut, convenient of tight lock
3. Burst pressure over 3000 psi



**MODEL:- HS-41036/41060RYB
FOR - R-410A**

36" charging hose-4000 psi
R:1/4SAE(STR)-5/16SAE(45°)
Y:1/4SAE(STR)-1/4SAE(45°)
B:1/4SAE(STR)-5/16SAE(45°)

60" charging hose-4000 psi
R:1/4SAE(STR)-5/16SAE(45°)
Y:1/4SAE(STR)-1/4SAE(45°)
B:1/4SAE(STR)-5/16SAE(45°)

1. PTFE gasket, long-lasting
2. Hex knurled nut, convenient of tight lock
3. Burst pressure over 4000 psi

GAUGES



MODEL:- HS-125012G/50012G

Pressure gauge H D70mm
refrigerants: R22 R134a R404A,
R410A
with Rubber Guard



Back connection gauge without oil
MODEL:- HS-25012FG/5-12FG

R22 R134a R404A R407c

**Pressurized for 72 hours, safe and
reliable**



**BACK CONNECTION
GLYCRINE GAUGE**
MODEL:- HS-25012G0/50012G0

Oil gauge H/L
refrigerants: R22 R134a R404A
R407C
Unit: psi Mpa °C -5~+120°C

DIGITAL GAUGES



MODEL: HSD-5300


'Digital pressure gauge

Refrigerants: R134a R1234yf R22 R32 R404A R407C R410A R507
R600A

Accuracy: 1% Pressure Unit: psi, Mpa, bar, Kpa,
Temperature unit: °F, °C 22 R134a R404A R407c


Accuracy: CL1.0, actual accuracy reach CL0.5

THREE WAY VALVE

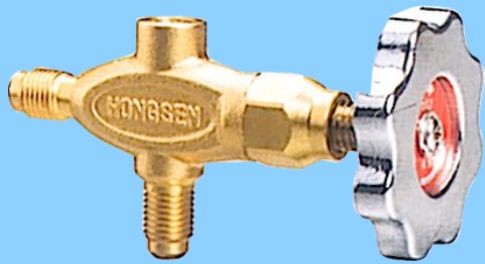

MODEL:- HS-466N


High quality Brass Alloy
Valve Body - Hard

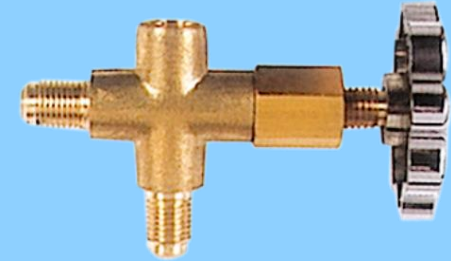

MODEL:- HS-466

High quality Brass Alloy
Valve Body - Soft

CAN TAP VALVE

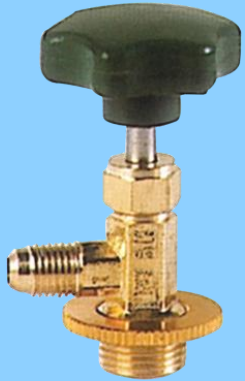

MODEL:- HS-339


Can tap valve 1/4 SAE
Bar



MODEL:- HS-339A

Can tap valve(New) 1/4
SAE HNBR

HIGHLIGHTS
Patent design
with non-return function

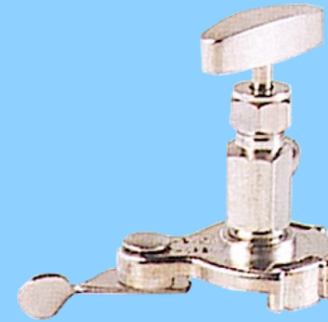

MODEL:- HS-340

Can tap valve 1/4
SAE Bar




MODEL:- HS-340A

Can tap valve(New) 1/4 SAE
HNBR

HIGHLIGHTS
Patent design
with non-return function

CAPILLERY WITH NUT AND CHARGING VALVE

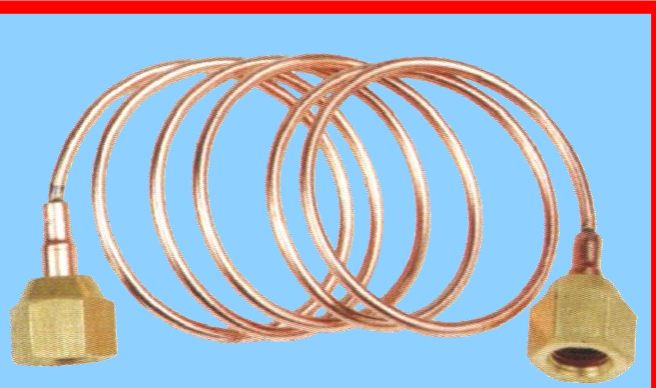

MODEL:- HS-1M

**Capillary With nuts 1M
(900mm)**



MODEL:- HS-110

Charging Valve

Thank you
